



**Generation Interconnection Facilities Study Report
Request # GI-2009-08
Draft**

30 MW PV Solar Generation
Alamosa County, Colorado

Public Service Company of Colorado
Transmission Planning

June 3, 2013

I. Executive Summary

This Draft Interconnection Facilities Study Report summarizes the analysis performed by Public Service Company of Colorado (PSCo) to specify and estimate the cost of the siting, engineering, equipment procurement and construction needed to interconnect a 30 x 1 MW Solar PV generation facility in Alamosa County, Colorado.

The new Solar PV generation is proposed to interconnect to the Alamosa Terminal 69 kV substation (see Figure 1). The Solar PV generating facilities are located approximately 1 mile southwest of Alamosa, Colorado and would be connected via a customer owned radial 69 kV line. The requested commercial in-service date was March 31, 2013. This date is already past and cannot be met.

The total estimated cost for the facilities required for interconnection is **\$1.732 million**¹ and includes one (1) 69 kV circuit breaker, three (3) 1200 A switches and bus work, metering, communications and transmission line bus tie connection.

- \$1.271 million for PSCo-Owned, Customer-Funded Interconnection Facilities
- \$0.461 million for PSCo-Owned, PSCo-Funded Network Upgrades for Interconnection

The estimated time required to site, engineer, procure and construct the facilities described is at least 12 months from the date the Customer meets all applicable Milestones as agreed to in any future LGIA. An Engineering & Procurement Agreement can be executed to facilitate completion of the interconnection facilities.

Please note that in addition to the facilities identified and estimated in this Facilities Study, PSCo is reviewing a requirement to add Power Quality monitoring capability to all solar photovoltaic generating facilities to monitor power quality compliance at the Point of Interconnection with IEEE Standard 519 and the Xcel Energy Interconnection Guidelines. PSCo reserves the right to add this monitoring capability some time in the future.

A proposed Station One-Line diagram for the Alamosa Terminal Switchyard is shown in Figure 2.

There are no PSCo Network Upgrades for Delivery required for this Interconnection.

¹ Appropriation estimates considered to have an accuracy of +/- 20%.

Figure 1: Network Diagram with Proposed POI at Alamosa Terminal 69 kV


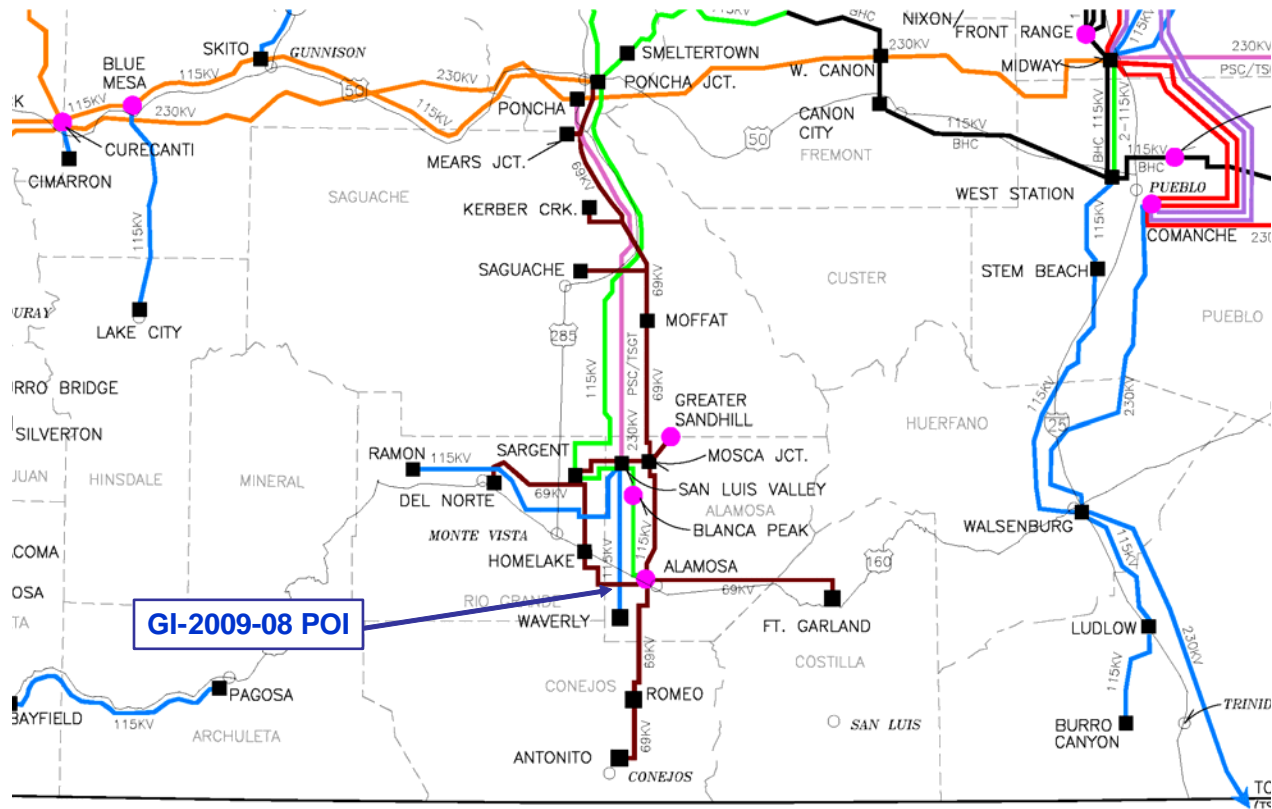


Figure 2: Alamosa Terminal 69 kV Substation Budget One-Line Diagram

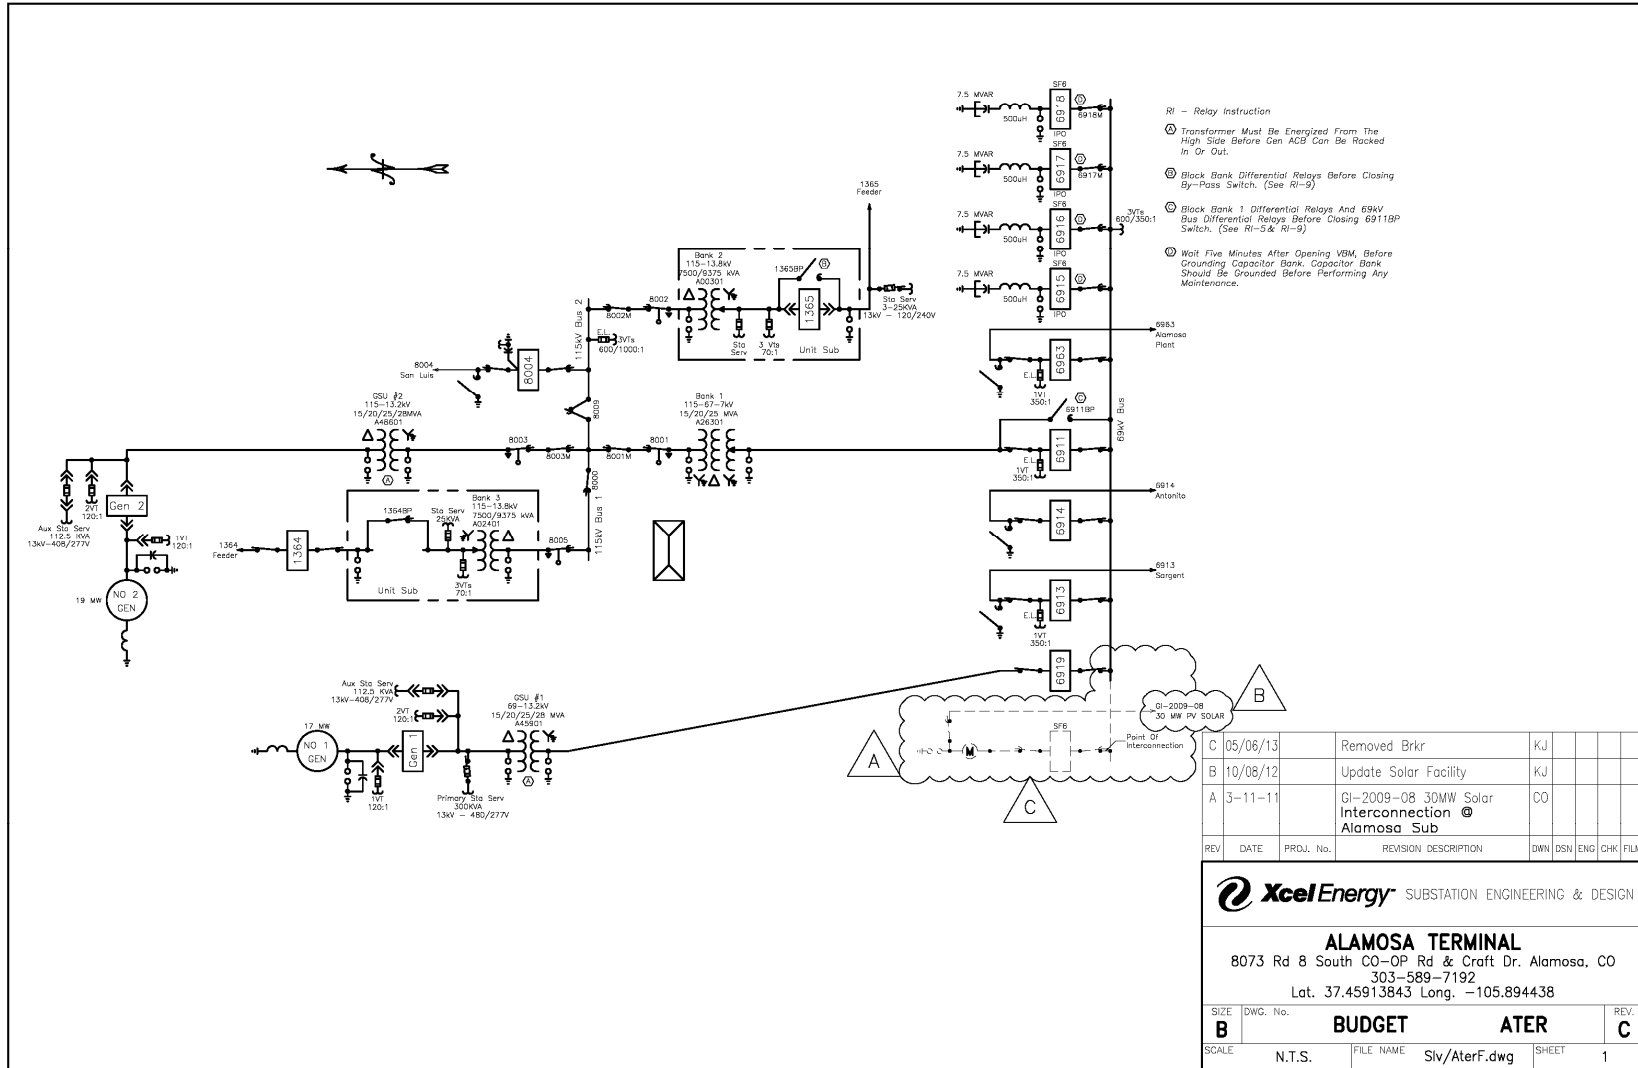

II. Introduction

On July 15, 2009 PSCo Transmission received a generation interconnection request for 40 MW of solar photovoltaic generation injecting into the Alamos Terminal 69 kV substation in Alamosa County, Colorado. The results of the Feasibility Study were issued in July 2011. Subsequently, the request was reduced to **30 MW** of solar PV and the results of the System Impact Study were issued in October 2012. An agreement for a Facility Study was executed March 21, 2013. This report documents the results of PSCo's Facility Study efforts. Please note that the requested commercial in-service date was March 31, 2013. This date is already past and cannot be met.

III. General Interconnection Facilities Description

A. Project Purpose & Scope

This project is to connect a 30 MW solar power plant into the 69 kV bus at Alamosa terminal substation. The bus is a straight bus layout, so the interconnection will contain a single breaker, 3 gang switches, and a metering unit. The project is split into three estimates to account for the PSCo funded station improvements, the customer funded equipment of the interconnect, and the customer funded LFAGC RTU at the generation site.

Future Considerations

There are no future expansion plans on the 69 kV bus. The existing EEE building will be full after the relaying panel for this project is installed. The estimates for this project assume that no other projects will take the open relaying panel location.

Interconnection / Customer Cost Responsibility

The project cost will be split between PSCo and the generation customer. Each estimate prepared has a cost responsibility owner in the assumptions.

B. FERC and/or NERC Compliance Requirements

Critical Infrastructure Protection (CIP) Asset

The CIP status of this substation was verified on 5/15/2011.

C. Right of Way/Permitting

No land purchases or right of way/permitting are required for the substation portion of this project.

D. Electrical Features

Transmission Lines: Current Carrying Capacity of Affected/Tapped/New

No transmission line capacity will be impacted by this project.

Fault Current

Location	Type of Fault	Three Phase (A)	Single-Line-to-Ground (A)
	69 kV Bus		3364 A

Electrical Removals & Relocations

The existing 69 kV bus dead end will be removed and a new dead end structure will be installed per the below section.

Electrical Installations (Major Equipment)

As a part of this project, a new dead end tower will be installed with one new bay at the 69 kV bus. The dead end structure will have a mounted gang disconnect switch for metering maintenance and 3 arresters and 3 meters on structures below the dead end. The bay will contain a circuit breaker and 2 gang switches. The existing 69 kV bus will be extended to accommodate the new bay.

Electrical Equipment Enclosure (EEE)

No new EEE is necessary if no projects take the existing space in the building.

AC System

The existing AC system is adequate for the new breaker and relaying.

DC System

The existing DC system is adequate for the new breaker and relaying.

Grounding

The existing grounding is adequate.

Lightning Protection

The existing lightning protection is adequate. A new shield wire will be installed as a part of the transmission portion of this project.

Trenching & Cable

New conduit will be installed into the pull pit on the west side of the EEE. This conduit will run south to the new breaker installation.

E. Civil Features

Grading & Fencing

The existing grading and rock is adequate, although some will be disturbed and reinstalled as a part of this project.

SPCC (Oil Containment)

N/A

Civil Removals & Relocations

The 69 kV bus dead end will be removed and replaced.

Foundations & Structures

The following concrete slab foundations will be installed:

Quantity	Description	Approx. Size
1	69 kV Breaker	6'x8'

The following galvanized steel structures with drilled pier foundations will be installed:

Structure Quantity	Steel Description	Steel Wt./ Structure	Drilled Piers	
			Pier Qty/ Structure	Approx. Size Dia. Depth
6	Arrester/metering unit Stand			2'
1	69 kV dead end tower			6'
9	69 kV bus support			2'

All structures will be master or previously designed structures. The 69 kV deadend structure will be tubular steel; all others will be rolled steel.

F. Protection Features

The primary protection for the new bus tie interconnection to the solar plant is a line current differential scheme utilizing a SEL-311L relay (PKG-P). The PKG-P relay also implements a backup step distance and ground overcurrent scheme. A normally closed cutoff switch, 85CO-1, can be used to disable the pilot scheme. The operation of the trip output of the PKG-P relay, by either the pilot scheme or the backup step distance and ground overcurrent, operates the trip coil #1 of BKR1. Further, a separate output on the PKG-P relay initiates breaker failure for BKR1.

The secondary protection for the new bus tie interconnection to the solar plant is a line current differential scheme utilizing a SEL-311L relay (PKG-S). The PKG-S relay also implements a backup step distance and ground overcurrent scheme. A normally closed cutoff switch, 85CO-2, can be used to disable the pilot scheme. The operation of the trip output of the PKG-S relay, by either the pilot scheme or the backup step distance and

ground overcurrent, operates the trip coil #2 of BKR1. Further, a separate output on the PKG-S relay initiates breaker failure for BKR1.

Breaker failure and synch check for BKR1 are implemented utilizing a SEL-351 relay (BKR1 PKG-BF). The breaker failure scheme is initiated by the operation of the primary SEL-311L relay (PKG-P), secondary SEL-311L relay (PKG-S), and the 69kV bus lockout relay (86B). The trip output of the breaker failure relay operates the breaker failure lockout relay (BKR1 86BF), which consequently initiates DTT to the remote terminal at the Solar plant via the PKG-P and PKG-S relays using mirrored-bits. The 8155 86BF lockout relay also blocks closing of BKR 8155. A separate output on the PKG-BF relay will be used to trip the 69kV bus lockout relay (86BF). There is no auto-reclosing on BKR1. An output on the PKG-BF relay operates the close coil of BKR1 for a manual close. Another output on the PKG-BF relay provides SCADA synch check failure alarm.

The primary DTT scheme to the remote terminal at the solar plant is implemented using the 87L bits on the primary bus tie protection SEL-311L relay (PKG-P). The communication cutoff switch, 85CO-1, can be used to disable the DTT scheme. A breaker failure lockout relay (BKR1 86BF) contact wired to an input on the SEL-311L relay (PKG-P) initiates sending DTT to the remote terminal in case of BKR1 breaker failure. In case of receiving DTT from the remote terminal, an output on the SEL-311L relay (PKG-P) operates an auxiliary relay, 94DTT-P, which consequently operates the trip coil #1 of BKR1 and block closing of the same breaker.

The secondary DTT scheme to the remote terminal at the solar plant is implemented using the 87L bits on the secondary transmission line protection SEL-311L relay (PKG-S). The communication cutoff switch, 85CO-2, can be used to disable the DTT scheme. A breaker failure lockout relay (BKR1 86BF) contact wired to an input on the SEL-311L relay (PKG-S) initiates sending DTT to the remote terminal in case of BKR1 breaker failure. In case of receiving DTT from the remote terminal, an output on the SEL-311L relay (PKG-S) operates an auxiliary relay, 94DTT-S, which consequently operates the trip coil #2 of BKR1 and block closing of the same breaker.

The existing 69kV bus differential summation cabinet is to be modified to add CTs from BKR1. Further, the existing 86B lockout relay control circuit should be modified to add contacts to trip and block closing of BKR1 and to add a contact from the BKR1 86BF to trip 86BF.

G. Control Features

RTU

The existing RTU is a D20 M++ and is adequate for this installation.

Removals

No panels will be removed as a part of this project.

Control Panel Locations

Panel #	Panel Description	Size
1	Interconnect protection/breaker failure	24"
2	Metering panel	19"

H. Project Operating Concerns and Outages

Outages/Temporary Configurations

An outage on the 69 kV bus will be required to extend the bus and install the new bay. This is not currently anticipated to be an issue.

I. Material Staging Plan

All major material will be delivered to the site and staged there.

J. Related Projects

Transmission WO to build the line into the sub-no work order currently exists

K. Risk Check List

Risk factors identified at the time the Design Guide Package was prepared are indicated below. Explanations, where applicable indicate the action, if any, taken in the estimate as a result, such as additional contingencies or multipliers that were applied.

- Survey information is not available. Explain: The project has not officially begun so no surveying was completed.
- Soil boring results are not available. Explain: The project has not officially begun so no surveying was completed.
- Unusual soils or environmental conditions exist. Explain:
- Key materials or items need decisions or approvals. Explain:
- Potential permitting delays or unusual requirements exist. Explain:
- There are difficult or seasonal outage requirements. Explain: The 69 kV bus outage may be difficult to accomplish in the summer during the anticipated construction window.

- There are conflicting outage requirements. Explain:
- There are risks due to who will construct the project and their availability. Explain:

- Unusual construction techniques will be required. Explain:
- There are risks associated with plans to reuse existing material. Explain:
- There are potential alternatives still under consideration. Explain:
- Material prices are likely to change or volatile. Explain:
- Material lead times are likely to be longer than estimated. Explain:
- Labor prices are likely to change. Explain:
- There are existing erosion problems. Explain:
- The existing oil containment may not be adequate. Explain:
- The existing lightning protection may not be adequate. Explain:
- The existing bus and equipment ampacity may not be adequate. Explain:
- The existing drawings are incomplete and inaccurate. Explain:

Notes and Comments:

IV. Cost Estimates and Assumptions

GI-2009-8 (Facilities Study Report)

May 29, 2013

Appropriation level cost estimates for Interconnection Facilities and Network/Infrastructure Upgrades for Delivery (+/- 20% accuracy) were developed by PSCo Engineering. The cost estimates are in 2013 dollars with escalation and contingencies applied (AFUDC is not included) and are based upon typical construction costs for previously performed similar construction. These estimated costs include all applicable labor and overheads associated with the siting support, engineering, design, material/equipment procurement and construction of these new PSCo facilities. This estimate does not include the cost for any other Customer owned equipment and associated design and engineering.

The estimated total cost for the required upgrades for is **\$1,732,000**. Figure 3 below represents a conceptual one-line of the proposed expansion/interconnection at the Alamosa Terminal 69kV Substation. These estimates do not include costs for any other Customer owned equipment and associated design and engineering. The following tables list the improvements required to accommodate the interconnection and the delivery of the Project generation output. The cost responsibilities associated with these facilities shall be handled as per current FERC guidelines. Figure 4 below represents the estimated schedule for engineering, procurement & construction of the proposed interconnection facilities. System improvements are subject to change upon a more detailed and refined design.

Figure 3: Diagram of the GI-2009-08 Interconnection on Alamosa Terminal 69 kV bus

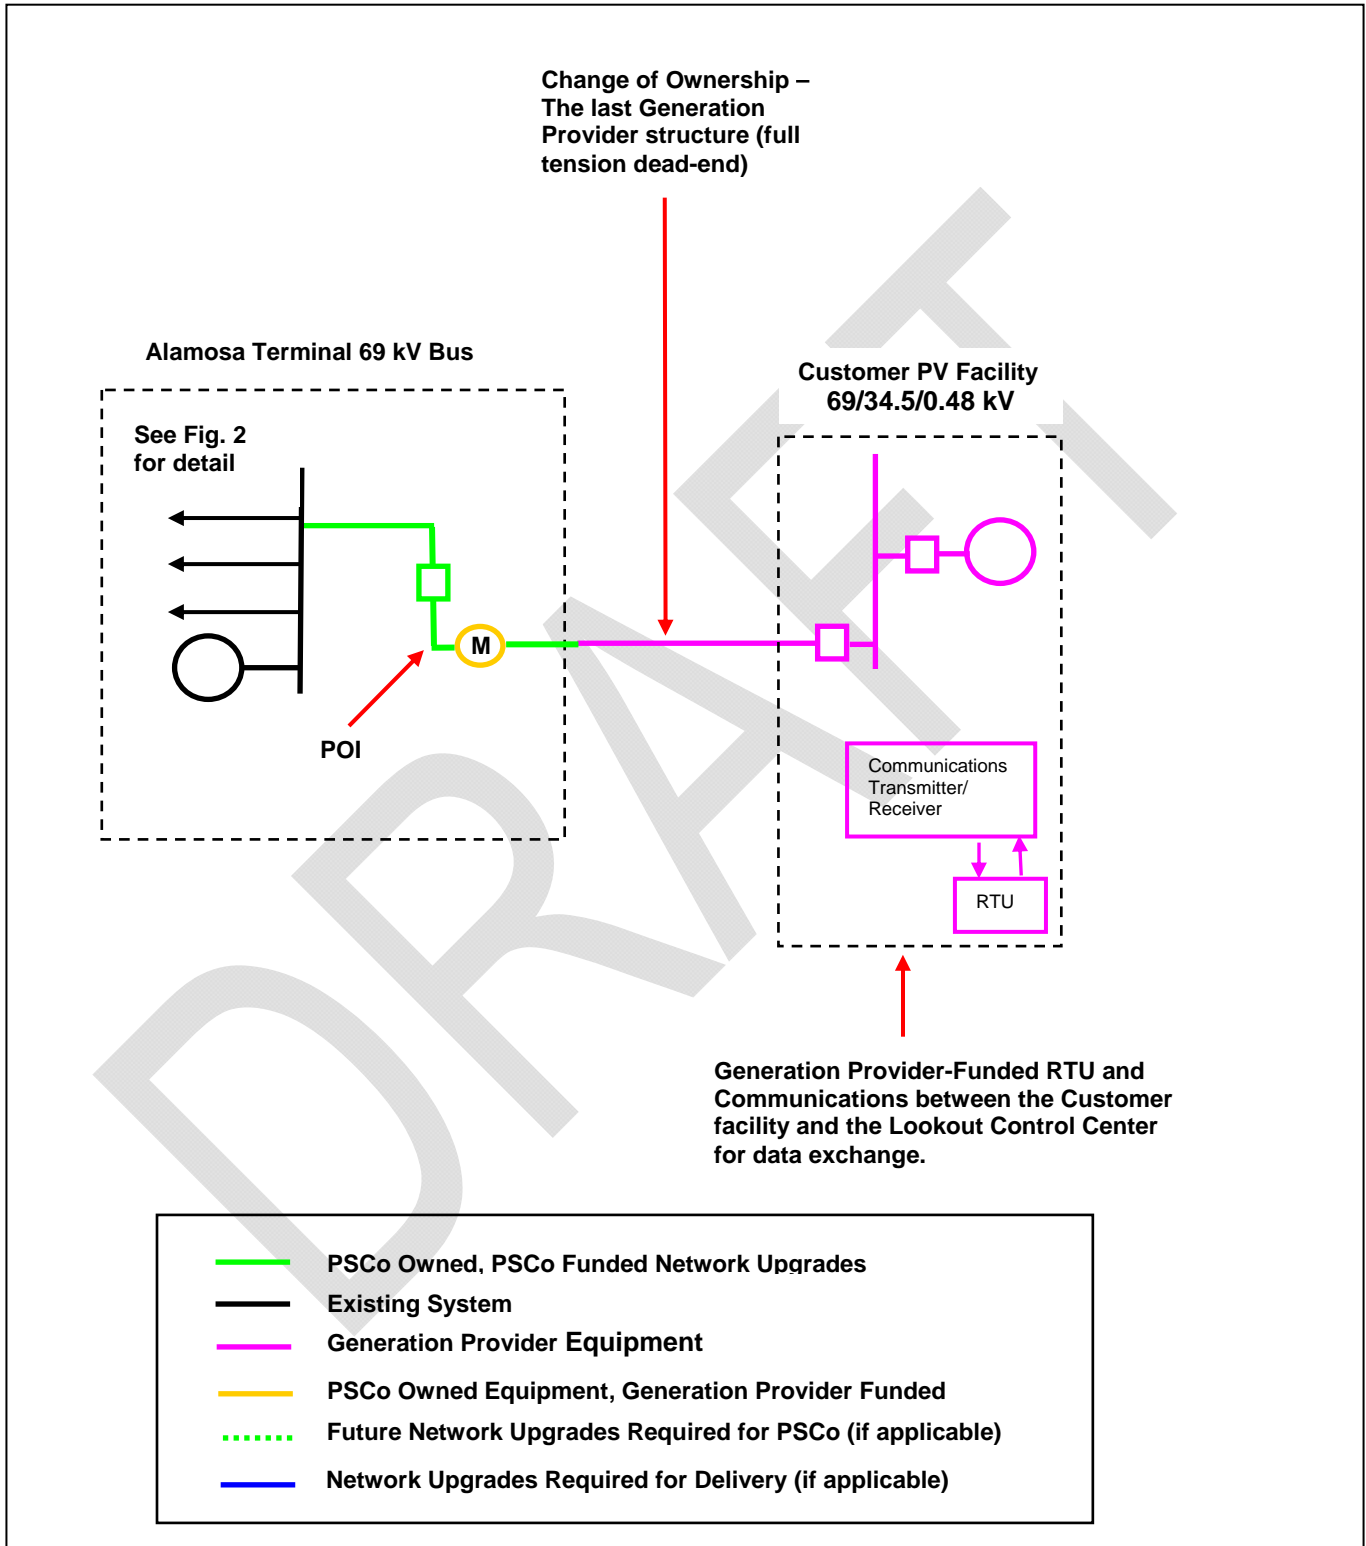


Table 1 – PSCo Owned; Customer Funded Transmission Provider Interconnection Facilities

Element	Description	Cost Est. (Millions)
PSCo's Alamosa Terminal 69kV Transmission Substation	Interconnect Customer to the 69kV bus at the Alamosa Terminal Substation. The new equipment includes: <ul style="list-style-type: none"> • One 69kV, gas circuit breaker • Three 69kV, 1200 amp gang switches • One 69kV combination CT/PT metering unit • Three 69kV lightning arresters • Primary metering for Load Frequency/Automated Generation Control • Associated electrical equipment, bus, wiring and grounding • Associated foundations and structures • Associated transmission line communications, fiber, relaying and testing 	\$0.962
PSCo's Alamosa Terminal 69kV Transmission Substation	Transmission line tap from Customer's last line structure outside of PSCo's yard into new bay position (assumed 300' span, conductor, hardware and labor).	\$0.057
	Sitting and Land Rights and Project Management support	\$0.010
Customer's 69kV Substation	Load Frequency/Automated Generation Control (LF/AGC) RTU and associated equipment	\$0.242
	Total Cost Estimate for PSCo-Owned, Customer-Funded Interconnection Facilities	\$1.271
Time Frame	Site, design, procure and construct	12 Months

Table 2: PSCo Owned; PSCo Funded Interconnection Network Facilities

	Description	Cost Estimate (Millions)
PSCo's Alamosa Terminal 69kV Transmission Substation	Interconnect Customer to the bus at the Alamosa Terminal Substation. The new equipment includes: <ul style="list-style-type: none"> • Associated station controls, communications, supervisory and SCADA equipment • Associated electrical equipment, bus, wiring and grounding • Associated foundations and structures • Associated equipment and system testing • Associated yard surfacing, landscaping, fencing 	\$0.461
	Total Cost Estimate for PSCo-Owned, PSCo-Funded Interconnection Facilities	\$0.461
Time Frame	Site, design, procure and construct	12 months

Table 3 – PSCo Network Upgrades for Delivery

Element	Description	Cost Est. (Millions)
	Not Applicable	
	Total Cost Estimate for PSCo Network Upgrades for Delivery	\$0
Time Frame	Site, design, procure and construct	
	Total Project Estimate	\$1.732

Cost Estimate Assumptions

- Appropriation level cost estimates for Interconnection Facilities and Network/Infrastructure Upgrades for Delivery (+/- 20% accuracy) were developed by PSCo Engineering.
- Estimates are based on 2013 dollars (appropriate contingency and escalation applied).
- AFUDC has been excluded.
- Engineering will be contracted out to a Design Consultant.
- Lead times for materials were considered for the schedule.
- The Solar Generation Facility is in PSCo's retail service territory
- PSCo (or it's Contractor) crews will perform all construction, wiring, testing and commissioning for PSCo owned and maintained facilities.
- Construction labor is estimated for straight time only – no overtime included.
- The estimated time to site (support), design, procure and construct the interconnection facilities is approximately 12 months after authorization to proceed has been obtained.
- This project is completely independent of other queued projects and their respective ISD's.
- A CPCN will not be required for the interconnection facilities construction.
- Line and substation bus outages will be authorized during the construction period to meet requested backfeed dates.

V. Engineering, Procurement & Construction Schedule

Figure 4: GI-2009-08 Estimated Schedule

